

## Novel Fusion Based Multi Level Clustering For Power Saving In Communication Of Wireless Sensor Network

1Ajay Bisen MTech Student EC Department  
Laxmi narayan college of technology and science  
Bhopal, India  
ajaybisen15ccna@gmail.com

2 Ankita R.Mowar Asst. Professor EC department  
Laxmi narayan college of technology and science  
Bhopal , India  
ankitamowar88@gmail.com

### Abstract

**In this paper, we focal point on the disturbed energy utilization of huge scale WSN in environmental observe. An analytical method is proposed to describe the decline of energy consumption on the radial direction. our research efforts have also been focused on reducing data traffic to a significant minimum. mainly posed by the severe energy and processing constraints of low-end wireless sensor nodes. To validate the proposed design, thorough simulations have been carried out. Comparing to a multi-hop LEACH protocol, the proposed NFMLC algorithm scheme offers consistent wider coverage area and longer life span of a wireless sensor network. The optimal case of energy consumption is given in a form of analytical solution. By compare it with the best case, we could appraise the protocol's performance on energy efficiency for extra optimization.**

**KEYWORDS:** LEACH protocol, NFMLC algorithm ,wsn

### I. INTRODUCTION

Recent technological advancements in low-power integrated electronic circuits, sensors, and wireless communication design and implementation of cost-effective large scale wireless sensor networks (WSNs). Energy is by distant one of the the majority significant aim hurdle that hindering the consumption of wireless sensor networks [1]. As the majority obtainable sensor network systems are powered by batteries, their lifetime are restricted by the storage capability of the battery used. The recent get through in wireless energy transfer technology developed by Kurs give a hopeful another to power these sensor nodes. We look forward to in the near

future a novel class of Wireless Rechargeable Sensor Networks will have potentials to fetch universal sensing, announcement and working out capability to our daily life. For example, devoid of batteries attached to a node, we can intend a lot smaller and more stretchy sensor nodes that can be attached to objects such as fruit and medicinal pills, which are not conventionally instrumented. obviously, by as long as realtime monitor potential to our dangerous daily products, we have the possible to considerably get better the excellence of living for the universal public. Recently, to get better the energy charge efficiency for wireless rechargeable sensor networks, a lot of works have focused on the interior microelectronics design [3]. While it is important to get better the essential microelectronics intend for wireless energy transfer systems, we study the realistic applications of wireless rechargeable sensor networks that the charge time of entity wireless rechargeable sensor nodes is as well not insignificant and plays an significant role in the on the whole system performance. For a characteristic wireless rechargeable sensor node, in many researcher the sensor node has to be wireless exciting more than a convinced threshold in arrange for a variety of sensing, working out and announcement components to function correctly. For example, through our empirical measurement. Such situation can be functional to a variety of types of industry settings, for example, in warehouse inventory management or in large distribution center. Our optimization object, consequently, is to recognize the most favorable reader stop locations and the consequent stop durations such that the totality delay to accuse every node in the network greater than their energy threshold is minimized. The most important offerings of this study are as follow. We recognize charging delay as single of the key intend hurdles in wireless rechargeable sensor networks

and initiate an efficient resolution to minimize charging delay in such networks.



Figure 1: WSN organize

To the most excellent of our knowledge, this is the primary work that affords a common mean to minimize charge delay in wireless rechargeable sensor networks. We prepare the charging delay minimization difficulty as a linear programming problem, which can be optimally resolve to recognize the most favorable reader stop locations and the equivalent stop durations. we study centralized ad distributed clustering . We introduce the concepts of the smallest enclosing.

In this research we proposed a method to fusion multi level clustering (FMLC) the sensor network according to the available energy of the cluster heads.

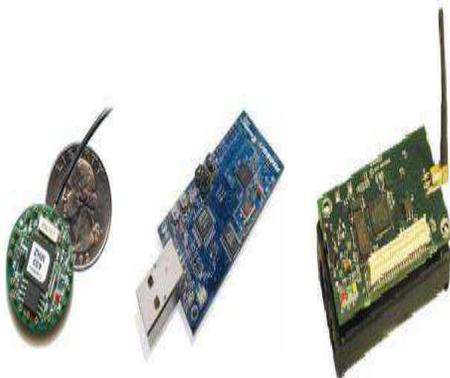


Figure 2 : Sensor nodes of WSN

Confronting energy challenges, plenty of research efforts have been devoted for employing energy-awareness at all layers of networking protocol stack. Many of the approaches are proposed from the

system level perspective, such as, dynamically scaling voltage, improving of communication hardware, optimizing of duty cycle, utilizing new energy-aware MAC protocol. On the hand, a number of propositions are presented from the network level perspective, such as, setting shorter routes, reducing number of data and control packets, minimizing node activity.

Based on the energy level in the cluster heads our NFMLC algorithm adaptively changes the size of the clusters. In the extreme situation when a cluster head totally exhausts is energy and is unable to continue, it is taken offline and the neighboring cluster heads in the network take over to serve the sensors. After recharging its battery the cluster head can be put back online to carry a share of the load according to its level of energy. Such adaptive clustering is aimed to increase the life of the cluster heads and improve the quality of service of the WSN.

## II. RELATED WORK

**Throughout the previous few years, a lot of** clustering algorithms have been proposed as an efficient method to organize communication and data processing in a sensor network. The problem of clustering network organization consists of several aspects that depend on the structure of the sensor network and the particular application's demands. It has been mentioned here some of the most relevant papers related to clustering.

My lahcen Hassnaoui [1] proposed enhanced and Balance LEACH (IB-LEACH), in which a quantity of high energy nodes call NCG nodes develop into cluster heads to combined the data of their cluster member and put out it to the selected gateways that necessitate the minimum statement energy to reduce the energy expenditure of cluster head and diminish probability of failure nodes. reproduction consequences illustrate that this protocol perform improved than LEACH and SEP in terms of network lifetime.

Sajjanhar et al. [2] planned a Distributive Energy Efficient Adaptive Clustering (DEEAC) Protocol, which is having spatio-temporal dissimilarity in data coverage rates crossways dissimilar regions. DEEAC select a node to be a cluster head depending winning its hotness value and remaining energy.

B. Elbhiri et al [3], projected SDEEC (Stochastic Distributed Energy-Efficient Clustering (SDEEC)

SDEEC initiate a balanced and dynamic scheme where the cluster head election probability is additional well-organized. furthermore, it use a stochastic method detection to expand the network lifetime. reproduction consequences illustrate that this protocol carry out improved than SEP and DEEC in stipulations of network lifetime.

Inbo Sim, et.al [4] planned Energy efficient Cluster header Selection (ECS) algorithm which choose CH by exploit simply its information to expand network lifetime and diminish added expenses in energy limited sensor networks.

### III. WSN MODEL:

This area portrays the remote sensor system (WSN) model. The WSN model comprises of N sensor hubs and one base station (BS) hub. All sensor hubs are indistinguishable and are accepted to have the accompanying capacities and components:

1. Sensing natural variables, for example, temperature, weight, and light
2. Data handling by low-control miniaturized scale controller
3. Radio correspondence
4. Powered by a restricted life battery.

The BS hub is accepted to have a boundless force source, preparing force, and capacity limit. The information detected by sensor hubs are sent to the BS hub over the radio, and a client can get to the information by means of the BS hub. In this WSN application, the clock synchronization of sensor hubs is an essential issue. Since the time at which an information was detected is essential, this requires low clock skew among all the sensor hubs. We expect that the low clock skew prerequisite is ensured by utilizing a clock synchronization strategy. The radio correspondence devours more vitality than the information handling on a sensor hub. We expect the accompanying vitality utilization model for radio correspondence. The transmission of a k-bit message with transmission range d meters expends  $ET(k, d)$  of vitality.

$$ET(k, d) = \begin{cases} k(E_{elec} + \epsilon_{fs} d^2) & \text{for } d \leq d_0 \\ k(E_{elec} + \epsilon_{mp} d^4) & \text{for } d > d_0 \end{cases}$$

$$k(E_{elec} + \epsilon_{mp} d^4) \text{ for } d > d_0$$

where  $E_{elec}$  is the electronics energy, and  $\epsilon_{fs}$  and  $\epsilon_{mp}$  are the amplifier energy factors for free space and multipath fading channel models, respectively. The reception of a k-bit message consumes  $ER(k)$  of energy.

$$ER(k) = k \cdot E_{elec}$$

### IV. Aim

Our objective is providing a fundamental in this research, and Novel-Leach on fusion based multi-level clustering scheme for wireless sensor network. The main purpose has been set to intend energy efficient routing protocols for WSN. Prior studies show that clustering mechanism enables bandwidth re-use and better resource allocation. Desired characteristics of the new protocols are non-overlapping cluster boundary, appropriate selection of cluster heads, multilayer hierarchy between clusters and optimized node activity. Moreover, data traffic in WSN is often congested with redundant data due to massive deployment of sensor nodes. Thus, our research efforts have also been focused on reducing data traffic to a significant minimum. mainly posed by the severe energy and processing constraints of low-end wireless sensor nodes. To validate the proposed design, thorough simulations have been carried out. Comparing to a multi-hop LEACH protocol, the proposed NFMLC algorithm scheme offers consistent wider coverage area and longer life span of a wireless sensor network.

### V. PROPOSED METHODOLOGY

For the reason that the CH consumes further energy, our protocol allocates this role to sensor nodes with elevated remaining energy. following each round, these CH will be replace with further sensor nodes with added outstanding energy. LEACH does not get into account the outstanding energy of sensor nodes throughout the selection of CH. The alternative is made randomly and every one sensor nodes in the network engage in recreation that role every so often. Furthermore, the CH communicates straight with the base station using the highest communication power, which needs a high energy. Our protocol uses short distance transmission to diminish energy consumption.

To examine the network lifetime, we have selected the subsequent three definitions. the time pending the first sensor node dies, the time awaiting half of the sensor nodes die, and the time awaiting the previous sensor node dies. Since extra than one sensor node is necessary to achieve the clustering, the last meaning represent the lifetime of the network when 80% of the sensor nodes die. In the case where the CH are not in the center of the clusters, a number of sensor nodes will consume additional energy than others. LEACH does not guarantee a good allocation of CH since the selection is done randomly without bearing in mind the network parameters. For the case of a network containing  $m = 0.5$  Fraction of advanced nodes having  $a = 1.5$  times more energy and  $m_0 = 0.4$  fraction of super nodes containing  $b = 3$  times more energy than normal nodes. From and 2, we examine that first node for LEACH, M-LEACH, F-LEACH and NFMLC ALGORITHM dies at 1117, 1470, 1583 and 1719 rounds respectively. All nodes are dead at 3500, 4150, 9673 and 9773 rounds respectively it is obvious from the results of all protocols that in terms of stability period, NFMLC ALGORITHM performs best of all, F-LEACH performs better than LEACH and M-LEACH but has less performance than NFMLC ALGORITHM .

The number of nodes alive in NFMLC ALGORITHM is quite larger than F-LEACH because in NFMLC ALGORITHM the formula used by nodes for CH selection is modified by including residual and average energy of that round. So Nodes having high energy will become CHs. Similarly, by Examining results of fig.3, packets sent to the BS by LEACH, M-LEACH, F- LEACH and N- LEACH have their values at 125316, 139314, 461946 and 470248. Now we see that packets sent to BS for LEACH and M-LEACH is almost same whereas, the packets sent to BS for F-LEACH and NFMLC ALGORITHM are almost the same because the probability equations for normal, advanced and super nodes is same in both of them. Now coming to the CHs, the packets sent to CHs increase during the start of the Network and gradually decrease down towards the end due to the nodes dying simultaneously.

We have examined LEACH, M-LEACH, F-LEACH and N- LEACH for heterogeneous WSNs containing different level of heterogeneity. Simulations prove that LEACH and M-LEACH Perform well in the networks contain high energy dissimilarity among normal, difficult and super nodes. Whereas, we discover out that F-LEACH and NFMLC ALGORITHM perform well in all scenarios. NFMLC ALGORITHM has best performance in terms of constancy period and life

time. So, NFMLC ALGORITHM is enhanced in terms of stability period while compromise on lifetime.

## VI. CONCLUSION

In this works, novel designs of NFMLC algorithm based on hybrid multi-level clustering (HMLC) structural design and protocol have been proposed for interconnect sensor nodes in a WSNs. The plan is particularly helpful in WSNs when a number of sensors do not arrive at the sink directly. by means of the energy constraints in WSNs, conventional wireless multi-hop routing protocols are not appropriate. Excluding the proposed plan creates a extremely interconnected tree graph in network, and the sensed data can obtain to the sink from far left. Imitation consequences point to that the uses of other LEACH a like design are not suitable since common of the frames generate by clusters can't arrive at the sink. The proposed design offer sensor network wide-area exposure, and generate frames can reach the sink.

## REFERENCE

- [1] Said Ben alla, Abdellah Ezzati, Abderahim Benihssane, My lahcen Hassnaoui "Improved and Balanced LEACH for heterogeneous wireless sensor networks" (IJCSSE) International Journal on Computer Science and Engineering Vol. 02, No. 08, 2010, 2633-2640
- [2] U. Sajjanhar, P. Mitra, "Distributive Energy Efficient Adaptive Clustering Protocol for Wireless Sensor Networks", Proceedings of the 2007 International Conference on Mobile Data Management, pp. 326 - 330, 2007
- [3] Elbhiri Brahim, Saadane Rachid, Alba-Pages Zamora, Driss Aboutajdine, "Stochastic Distributed Energy-Efficient Clustering (SDEEC) for heterogeneous wireless sensor networks", ICGST-CNIR Journal, Volume 9, Issue 2, December 2009.
- [4] Inbo Sim, Kounghin Choi, Kounghin Kwon and Jaiyong Lee, "Energy Efficient Cluster header Selection Algorithm in WSN", International Conference on Complex, Intelligent and Software Intensive Systems , IEEE, 2009.
- [5] Marco F. Duarte, Godwin Shen, Antonio Ortega and Richard G. Baraniuk, "Signal

- compression in wireless sensor networks,”  
Phil. Trans. R.Soc.A, Jan 2012, pp. 118-135.
- [6] D.L.Donoho, “Compressed Sensing,” IEEE Transactions. Information Theory, vol.52, no.4, April 2006, pp. 1289-1306.
- [7] E.J.Candes, “Compressive Sampling,” International Congress of Mathematicians, vol.3, pp. 1433-1452, Madrid, Spain, 2006.
- [8] R.Berinde, P.Indyk, “Sparse recovery using sparse random matrices,” MIT-CSAIL Technical Report, 2008
- [9] Anup Kumar Paul, Takuro Sato, “*Effective Data Gathering and Energy Efficient Communication Protocol in Wireless Sensor Network*”. Sch. of Global Inf. & Telecommun. Studies, Waseda Univ., Tokyo, Japan ; Sato, T.
- [10] S. Bandyopadhyay and E. J. Coyle, “*An energy-efficient hierarchical clustering algorithm for wireless sensor networks*”. In Proc. IEEE INFOCOM’03, 2003.
- [11] Crossbow Barnabas C. Okeke, K. L. Eddie Law, “*Multi-level Clustering Architecture and Protocol Designs for Wireless Sensor Networks*”. Ryerson University Toronto, Canada.
- [12] W. B. Heinzelman, “*Application-Specific Protocol Architectures for Wireless networks*”. Massachusetts Institute of Technology, Cambridge, MA, June 2000.